# luna<sup>®</sup> plus whirlpool bath

on crystal-clear nights, the romans worshipped luna—goddess of the moon. feel a bit worshipped yourself in our Luna® whirlpool.







The Luna<sup>®</sup> whirlpool bath surrounds you bathes you in the warmth of a thousand balmy summer nights. And Luna's simple styling meets the mood of most any décor with ease. So, turn down the lights, relax and revitalize.

whirlpool bath features:

- 4 fully adjustable TheraPro<sup>™</sup> jets
- 4 directionally adjustable AccuPro<sup>™</sup> jets
- RapidHeat<sup>™</sup> in-line heater
- Electronic on/off control with temperature readout
- . Patented Adjustable Silent Air™ Induction System
- . Chromatherapy™ lighting system capable of 256 colors

• PrO<sub>3</sub><sup>™</sup> Sanitation System

#### luna<sup>®</sup> plus whirlpool bath

model number: BP75, EN80

exterior dimensions: 72" long x 42" wide x 23" high

interior dimensions: 41" long x 21" wide

# of Jets/type of Jets: 4 TheraPro<sup>™</sup> Jets 4 AccuPro<sup>™</sup> Back Jets

operating gallons: 96 gallons

Detail: The Luna® plus whirlpool bath's simple, oval shape is augmented by charming, classic detailing. Perfectly positioned, Jacuzzi<sup>®</sup> exclusive TheraPro<sup>™</sup> jets collaborate with the contours of the tub to create the buoyancy that is the basis of hydrotherapy.





### **Ordering Information**


Product Code:

BP75 Luna® 6 Whirlpool Bath Right Hand EN80 Luna® 6 Whirlpool Bath Left Hand

- Center Drain Location
- Accessories / Hardware: Trip-Lever Drain Kit #X559 Rotary Trip-Lever Drain Kit: #K606 TheraPro™ Jet Rings Kit: #D095 AccuPro™ Jet Rings Kit (2 Req'd): #P556
  Trim Kit Finishes Available: (827) - Chrome

(898) – Brushed Chrome (815) – Satin Nickel (829) – Bright Brass

- (805) Platinum
- (826) Brushed Nickel
- (845) Oil Rubbed Bronze

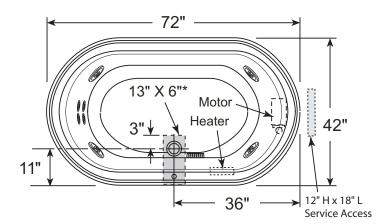

Product Shown: Luna® 6 Plus Whirlpool Bath Right Hand Model: BP75 \* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.

### **Installation Notes**

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## **Technical Specifications**

**Dimensions** 72" L x 42" W x 23" H (1829 mm) L x (1067 mm) W x (584 mm) H

Drain/Overflow A: 19-1/8" (486 mm) B: 11" (279 mm)

Cutout Template provided P/N P819000

**Total Weight** 1176 lb (533 kg) / 56 lb/sq. ft. (273 kg/m<sup>2</sup>)

**Operating Gallonage** 96 U.S. Gal. (363 Liters) Max. 103 U.S. Gal. (379 Liters)

Product Weight 126 lb (57 kg)

Skirt Mounting Not Available

Electrical Specifications Requires a dedicated GFCI protected separate circuit. Motor/Pump: 120 VAC, 15 AMP, 60 Hz. RapidHeat<sup>TM</sup>:120 VAC, 15 AMP, 60 Hz.

Heater (Standard) Requires a dedicated GFCI protected separate circuit. RapidHeat<sup>TM</sup>: P/N S750000

Image: With a state of the state of the